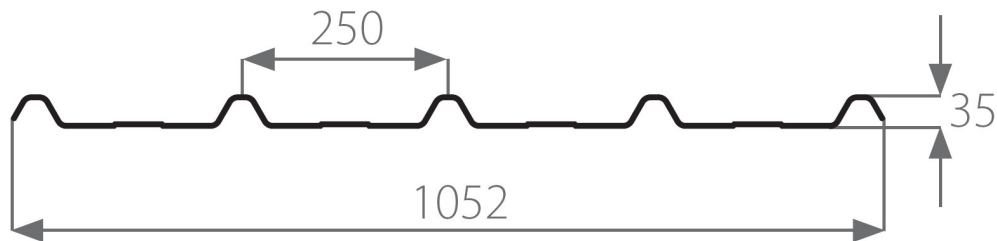


Product Description:

- SUNTUF Co-extruded UV protection on one side.
- SUNTUF UV2 Co-extruded UV protection on two sides.







Profile drawing:



General properties:

Dimension	Value
Thickness (Avg.)	1.0 to 1.5 mm
Length	1500-11,600 mm
Net cover	1000 mm
Profile height	35 mm

Load / Span Data

Load (kg/m ²)	Maximum Roof Span (mm)					
	1.0 mm		1.2 mm		1.5 mm	
	Single Span 	Multi Span 	Single Span 	Multi Span 	Single Span 	Multi Span 
50	1025	1175	1075	1250	1175	1350
75	875	1025	950	1075	1025	1175
100	800	925	850	975	925	1050
125	750	850	800	900	850	975
150	700	800	750	850	800	925

- The specified dimensions do not supersede the requirements of local construction codes.
- The given spans are according to deflections criterion of L/50, and minimum slope of 5%.
- The maximum roof spans are based on calculation model and practical testing.
- The mentioned load refers to wind and snow load only.
- For vertical application spans can be increased by 10%.

Typical Properties

Property	Standard	Conditions	Unit	Value
Density	ASTM D792	-	g/cm ³	1.2
Heat Deflection Temperature	ASTM D648	1.82 MPa	°C	130
Service Temperature (Short term)	-	-	°C	-50 to 120
Service Temperature (Long term)	-	-	°C	-50 to 100
Coefficient of Linear Thermal Expansion	ASTM D696	-	cm/cm °C	6.5 X 10 ⁻⁵
Thermal Conductivity	ASTM C177	-	W/mK	0.21
Tensile Strength at Yield	ASTM D638	10 mm/min	MPa	62
Tensile Strength at Break	ASTM D638	10 mm/min	MPa	65
Elongation at Yield	ASTM D638	10 mm/min	%	7
Elongation at Break	ASTM D638	10 mm/min	%	>80
Tensile Modulus of Elasticity	ASTM D638	10 mm/min	MPa	2300
Flexural Strength	ASTM D790	1.3 mm/min	MPa	93
Flexural Modulus	ASTM D790	1.3 mm/min	MPa	1890
Impact Falling Weight (E-50)	ISO 6603/1		J	50
Rockwell Hardness	ASTM D785		R Scale	118R
Light Transmission	ASTM D1003		%	90
Haze	ASTM D1003		%	<0.5
Yellowness Index	ASTM D1925			<1

*Please refer to Technical guide for more details.